


# CONCRETE JUMBO MANHOLE GRADE RINGS

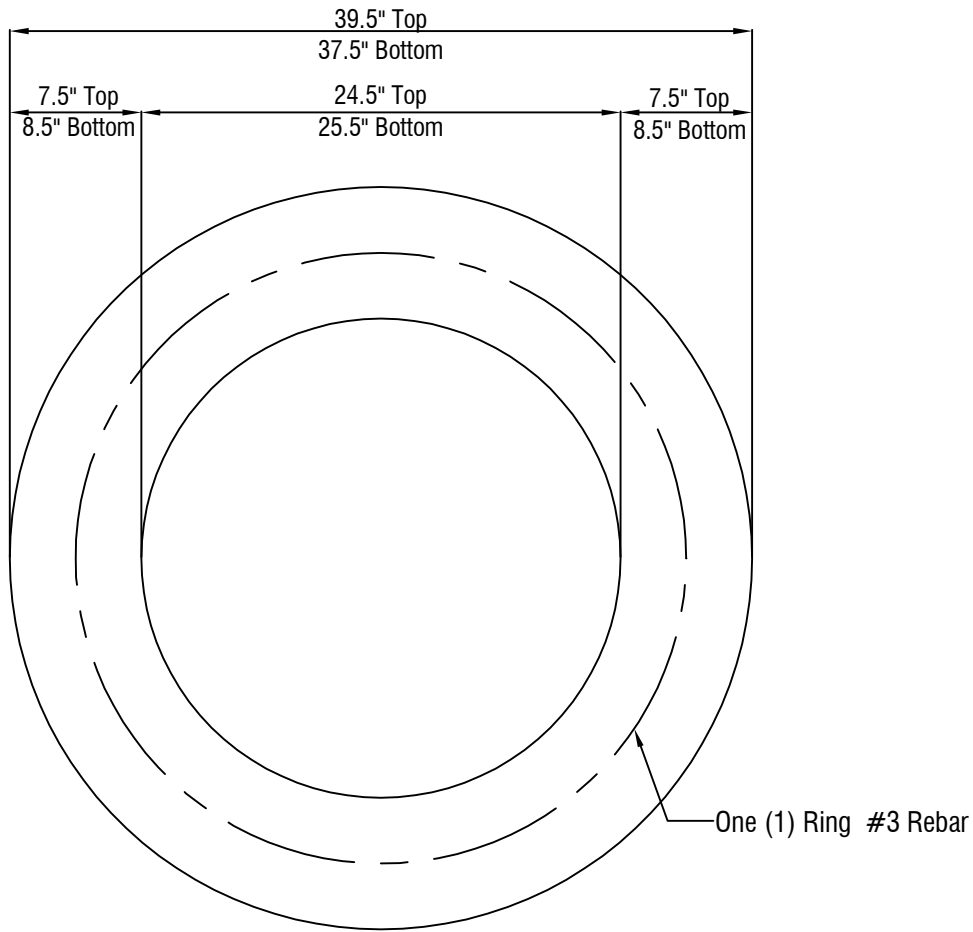

One (1) Ring #3 Rebar

Made of 4000 PSI Concrete

PLAN VIEW



ELEVATION VIEW

Lay Length	Packing Quantity	Part #
2"	15	M2 MHG RJ
4"	8	M4 MHG RJ
6"	6	M6 MHG RJ

**Masonry Supply, Inc**  
P.O. BOX 943  
SELMA, NC 27576  
PH: (919) 351-4014 (office), (919) 291-8761 (cell) FAX: (919) 351-4047  
EMAIL: masonrysupply@hotmail.com

ITEM: PRECAST CONCRETE MANHOLE ADJUSTING RINGS

PART # SEE INSERT

MATERIAL SPEC: A - 3 CONCRETE (4000 PSI @ 28 DAYS)

LOAD RATING: H - 20 LOAD RATED